

# Exhibit A

US009398629B2

(12) **United States Patent**  
**Mohandas et al.**

(10) **Patent No.:** **US 9,398,629 B2**  
(45) **Date of Patent:** **Jul. 19, 2016**

(54) **SYSTEM AND METHOD FOR A  
DISTRIBUTED WIRELESS NETWORK**

(71) Applicant: **Alcatel-Lucent USA Inc.**, Murray Hill,  
NJ (US)

(72) Inventors: **Sindhu K. Mohandas**, Thousand Oaks,  
CA (US); **Abhishek Sinha**, Woodland  
Hills, CA (US)

(73) Assignee: **Alcatel Lucent**, Boulogne-Billancourt  
(FR)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 25 days.

(21) Appl. No.: **14/303,637**

(22) Filed: **Jun. 13, 2014**

(65) **Prior Publication Data**

US 2015/0365911 A1 Dec. 17, 2015

(51) **Int. Cl.**

**H04W 4/00** (2009.01)  
**H04W 76/02** (2009.01)  
**H04W 56/00** (2009.01)  
**H04W 24/02** (2009.01)  
**H04W 84/12** (2009.01)  
**H04W 88/12** (2009.01)

(52) **U.S. Cl.**

CPC ..... **H04W 76/021** (2013.01); **H04W 24/02**  
(2013.01); **H04W 56/001** (2013.01); **H04W**  
**84/12** (2013.01); **H04W 88/12** (2013.01)

(58) **Field of Classification Search**

None  
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2003/0037148	A1 *	2/2003	Pedersen	.....	G06F 9/542 709/227
2008/0080414	A1 *	4/2008	Thubert	.....	H04W 76/022 370/328
2010/0041405	A1 *	2/2010	Gallagher	.....	H04W 8/02 455/436
2012/0259992	A1 *	10/2012	Koehler	.....	H04W 76/022 709/229
2014/0003282	A1 *	1/2014	Kafle	.....	H04W 48/14 370/254
2015/0304886	A1 *	10/2015	Liu	.....	H04W 28/08 370/230

\* cited by examiner


Primary Examiner — Kevin C Harper


(74) Attorney, Agent, or Firm — Loza & Loza, LLP


(57) **ABSTRACT**

WLAN controllers in a same mobility domain are able to dynamically discover other WLAN controllers in the same mobility domain across one or more layer 2 or layer 3 network boundaries. A WLAN controller in the mobility domain determines an address of at least one seed WLAN controller in the mobility domain from a configuration server. The WLAN controller registers with the at least one seed WLAN controller in the mobility domain and receives information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller. The WLAN controller also receives synchronized wireless device information that allows a wireless device to roam from one AP adopted by the WLAN controller in a first access network to another AP adopted by another WLAN controller in a second different access network in the same mobility domain.

**18 Claims, 8 Drawing Sheets**

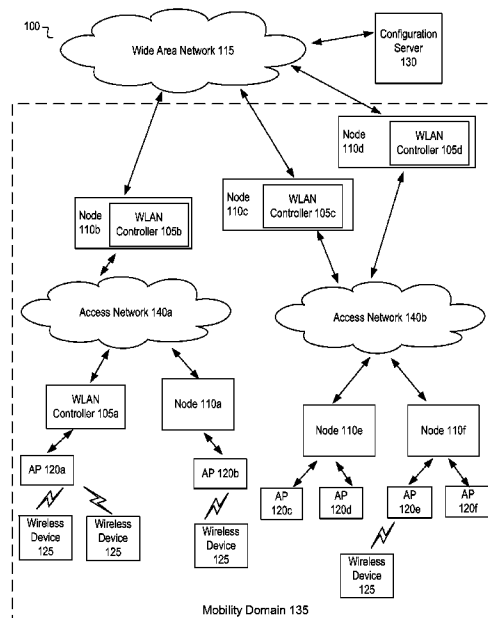

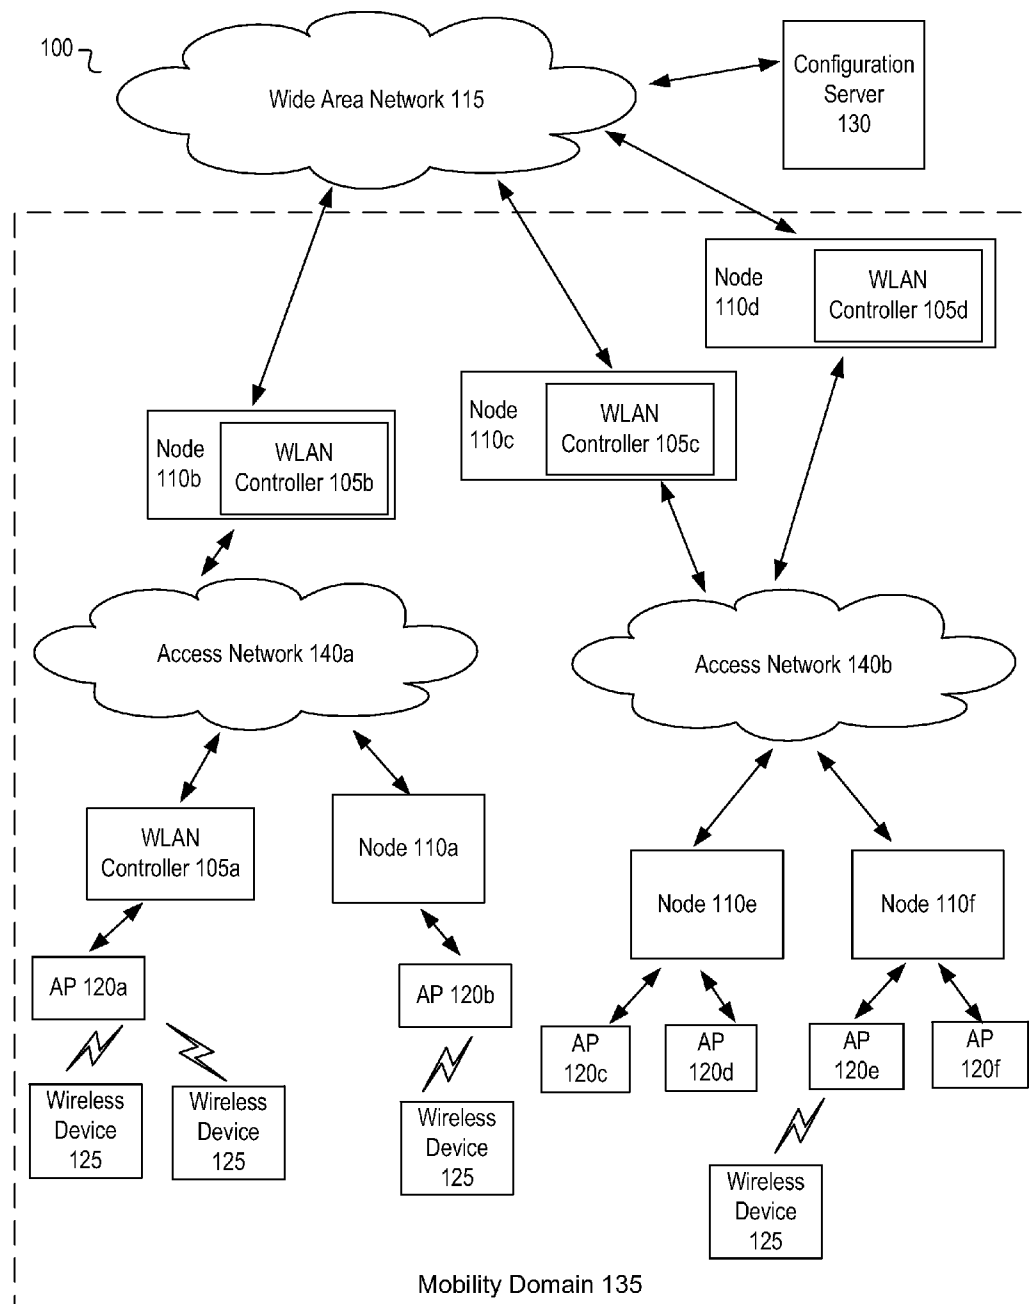**FIG. 1**

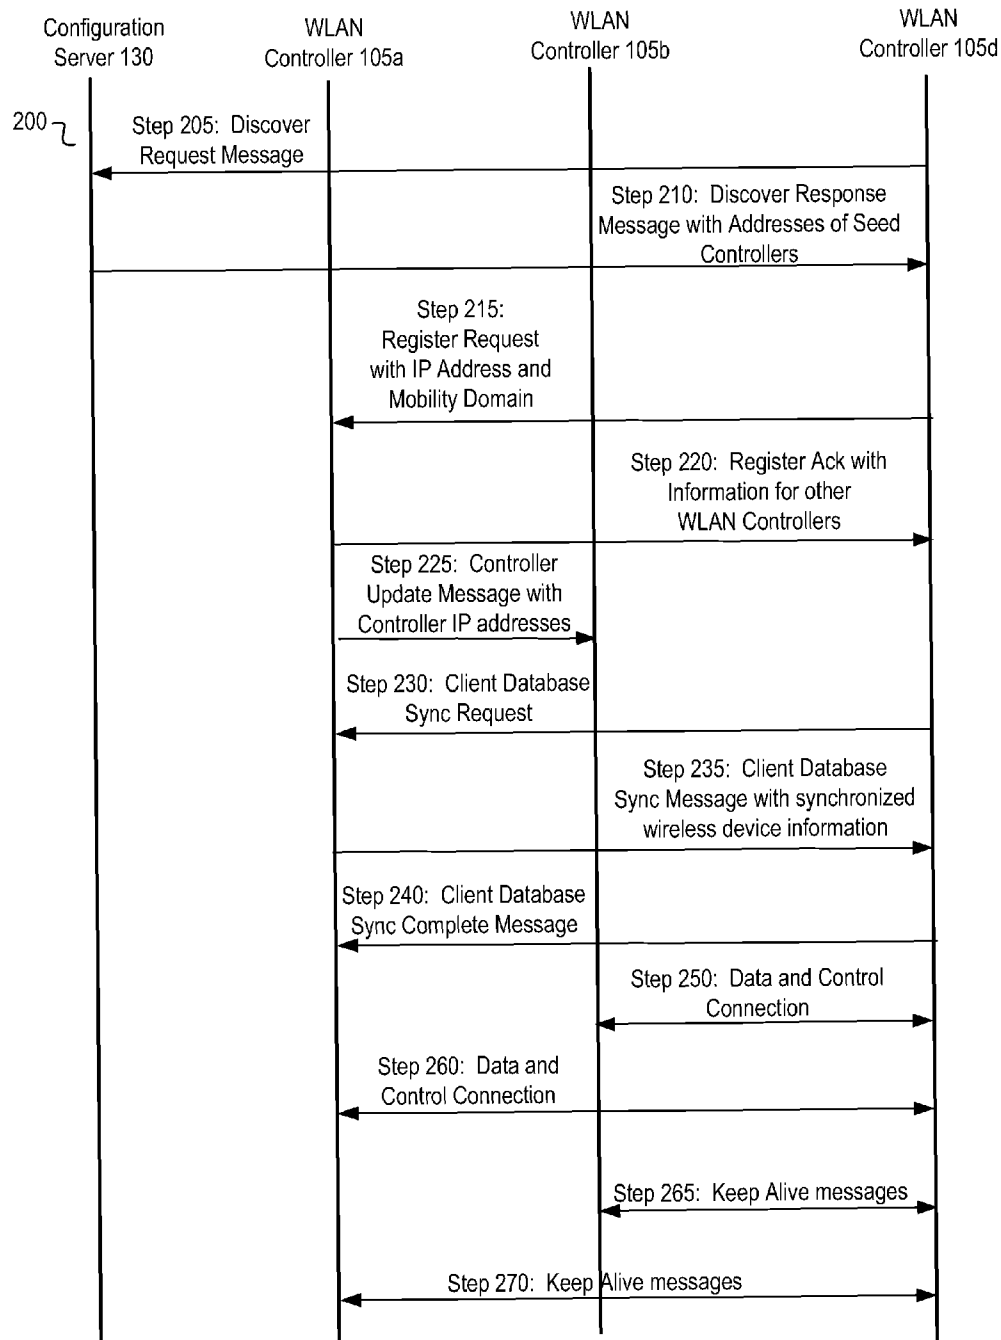**FIG. 2**

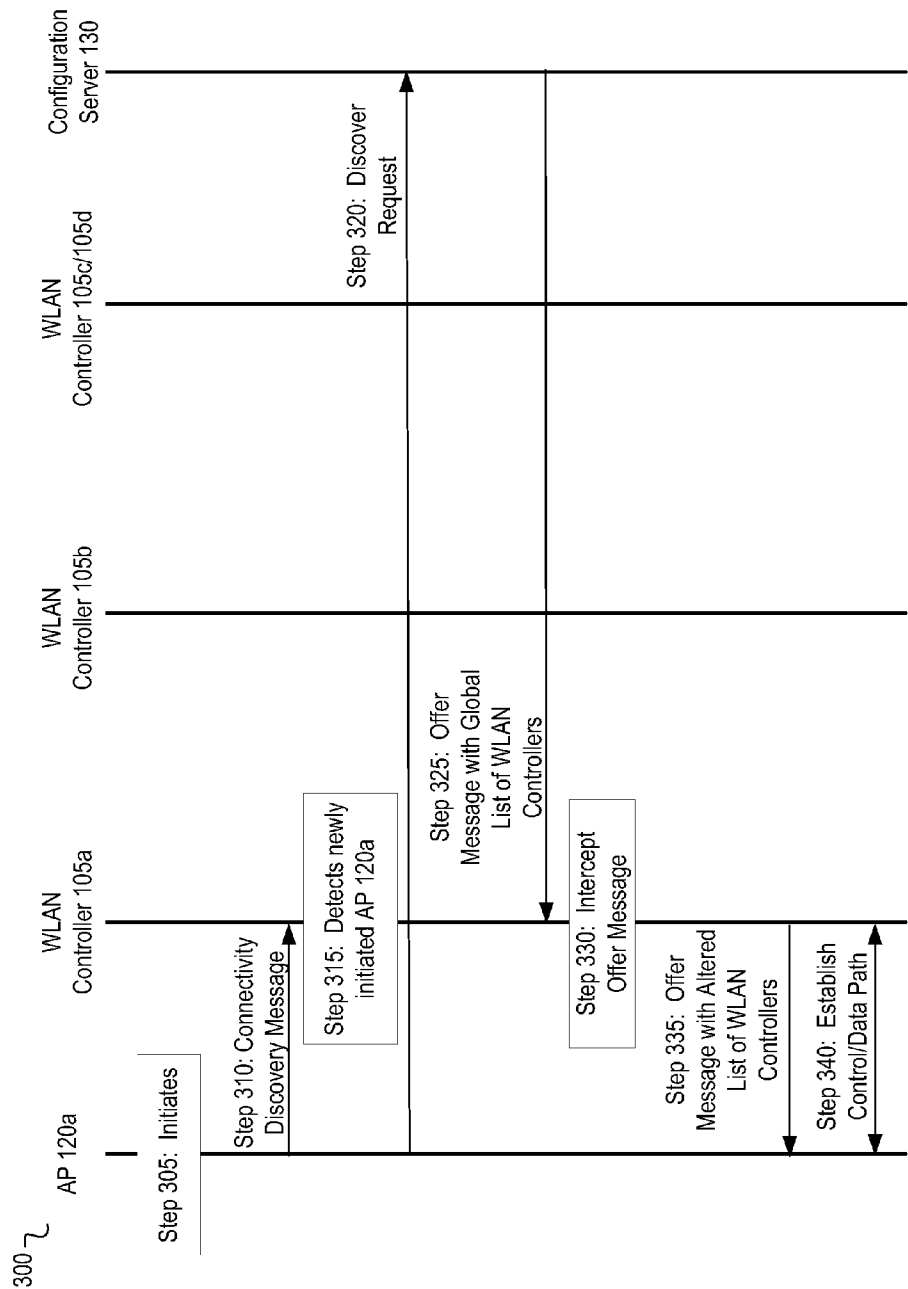
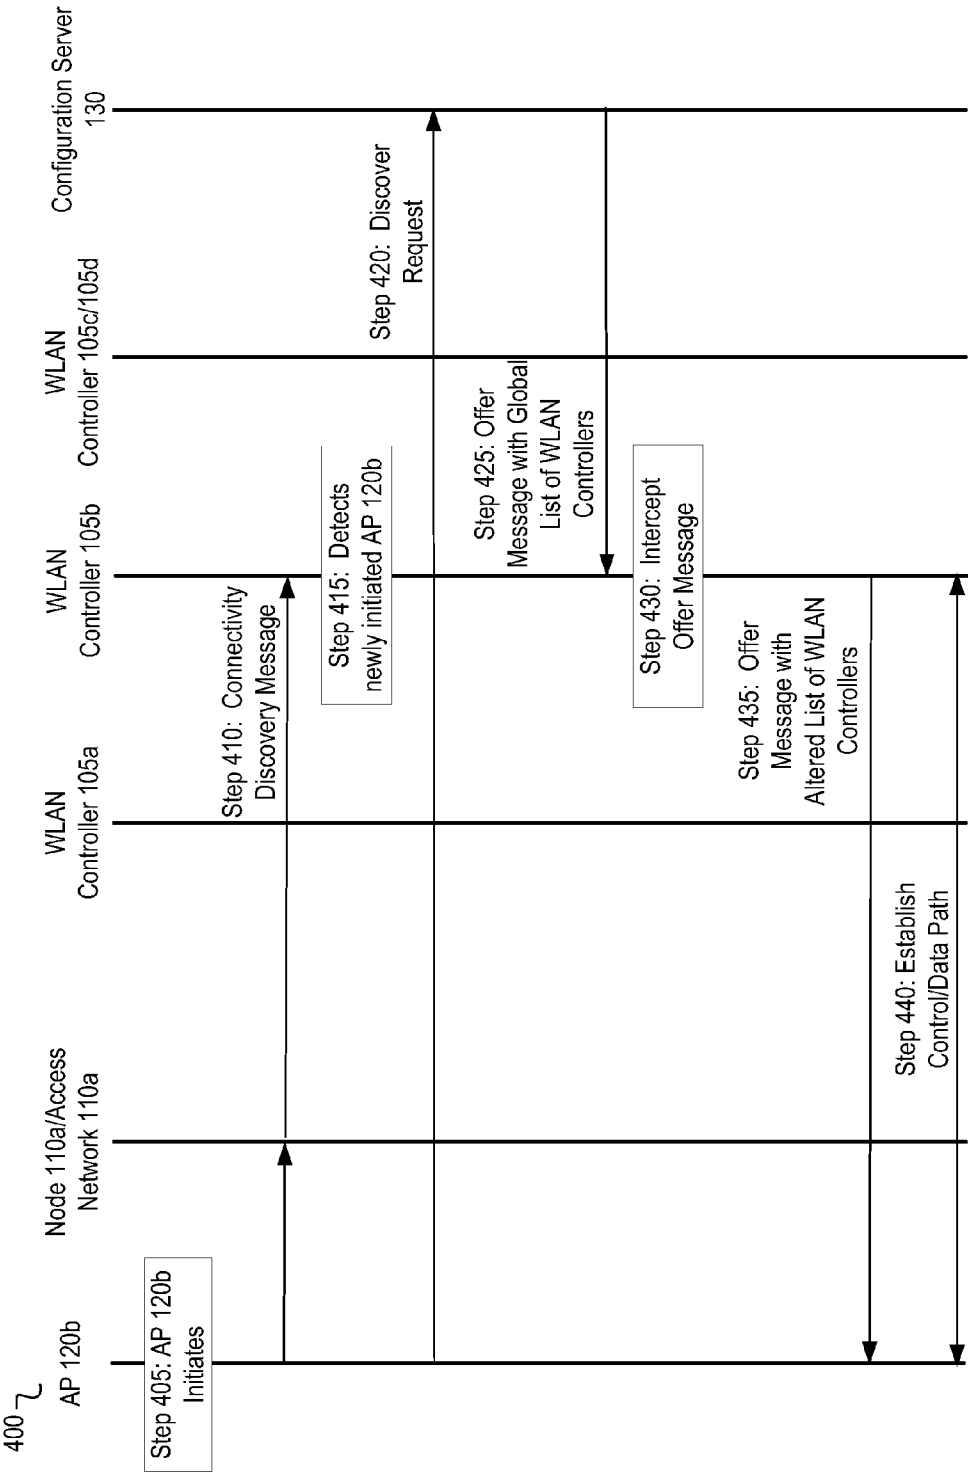


FIG. 3



**FIG. 4**

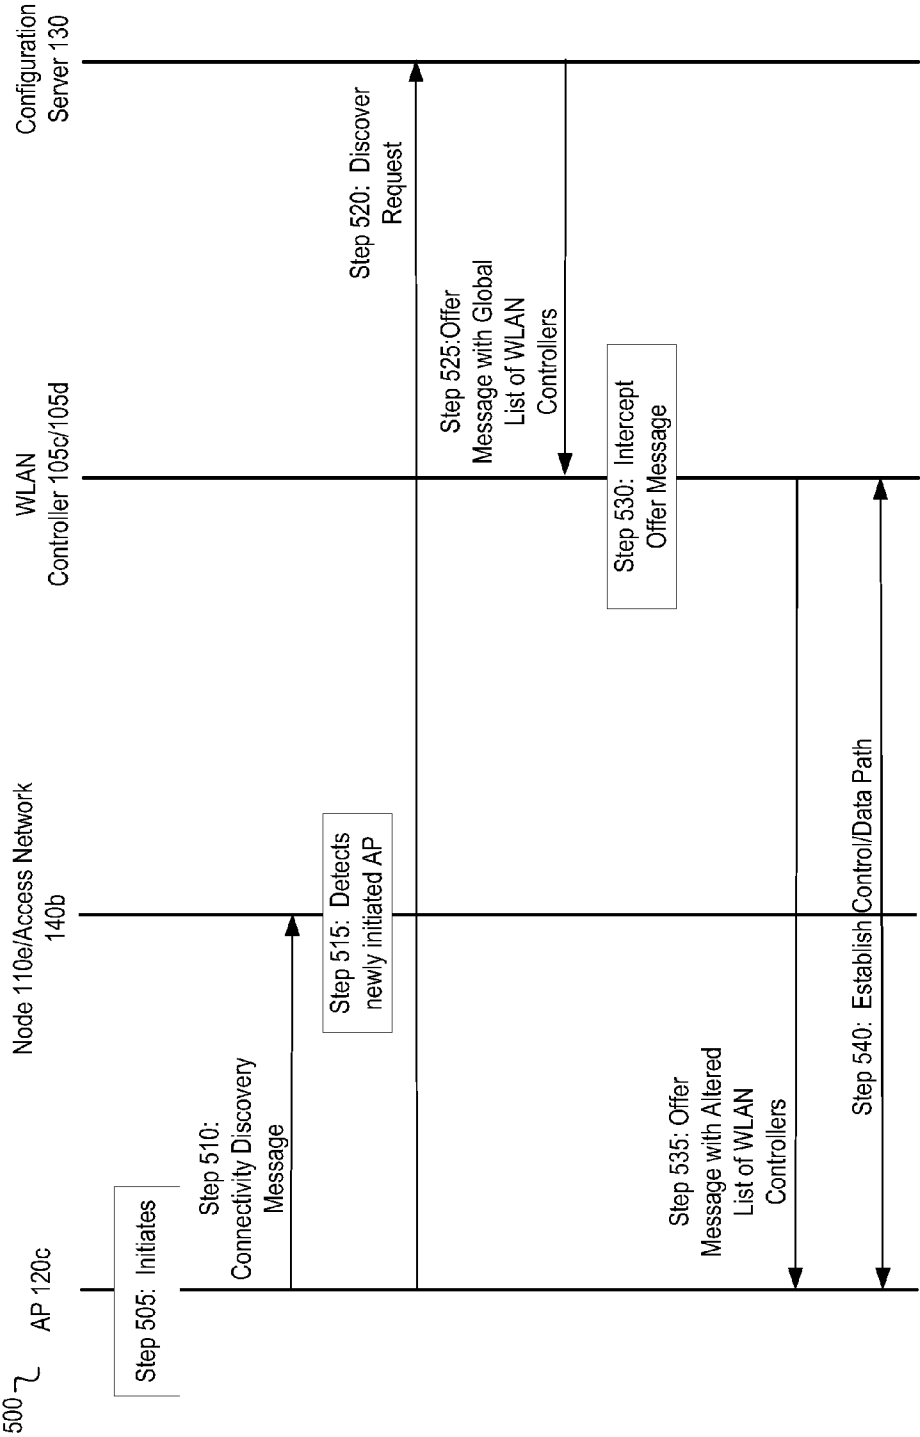


FIG. 5

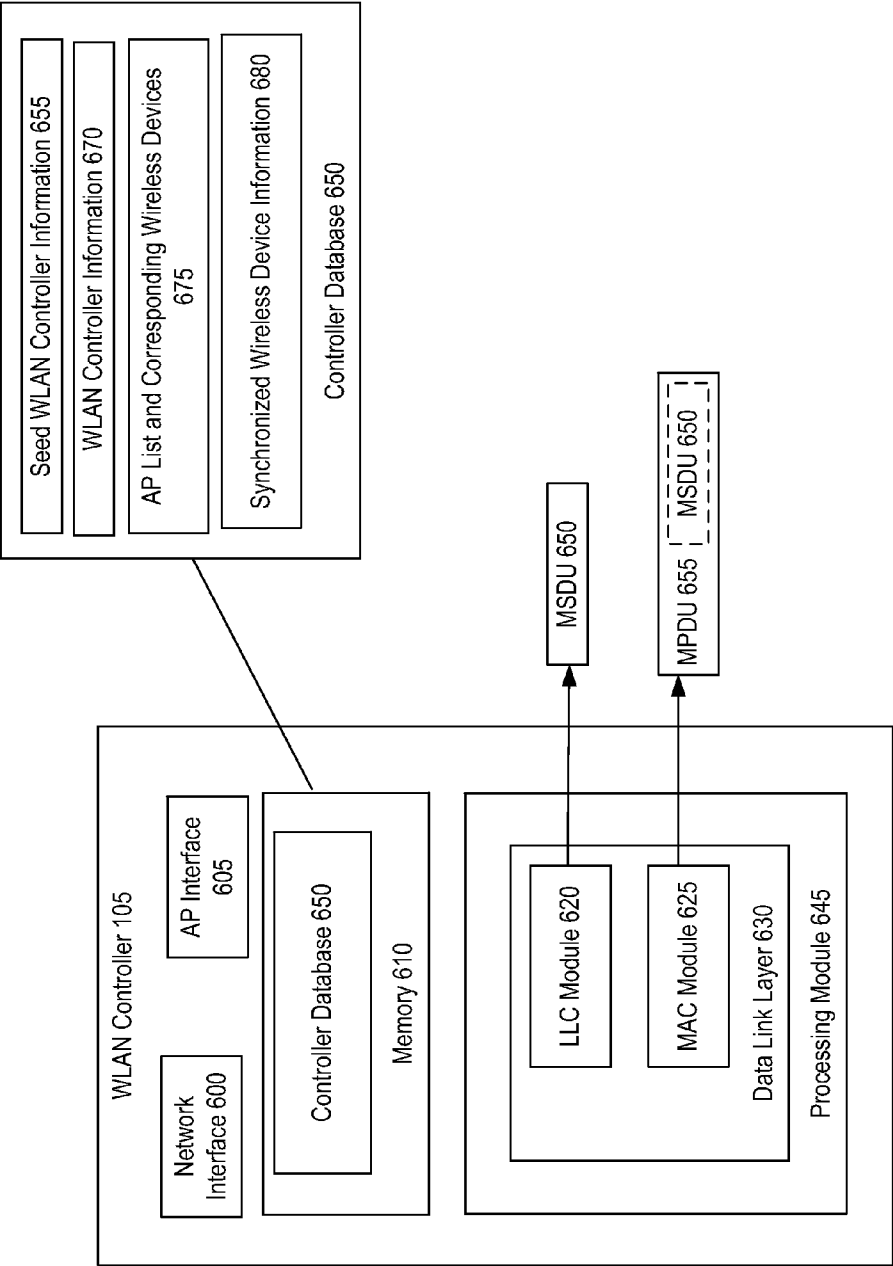
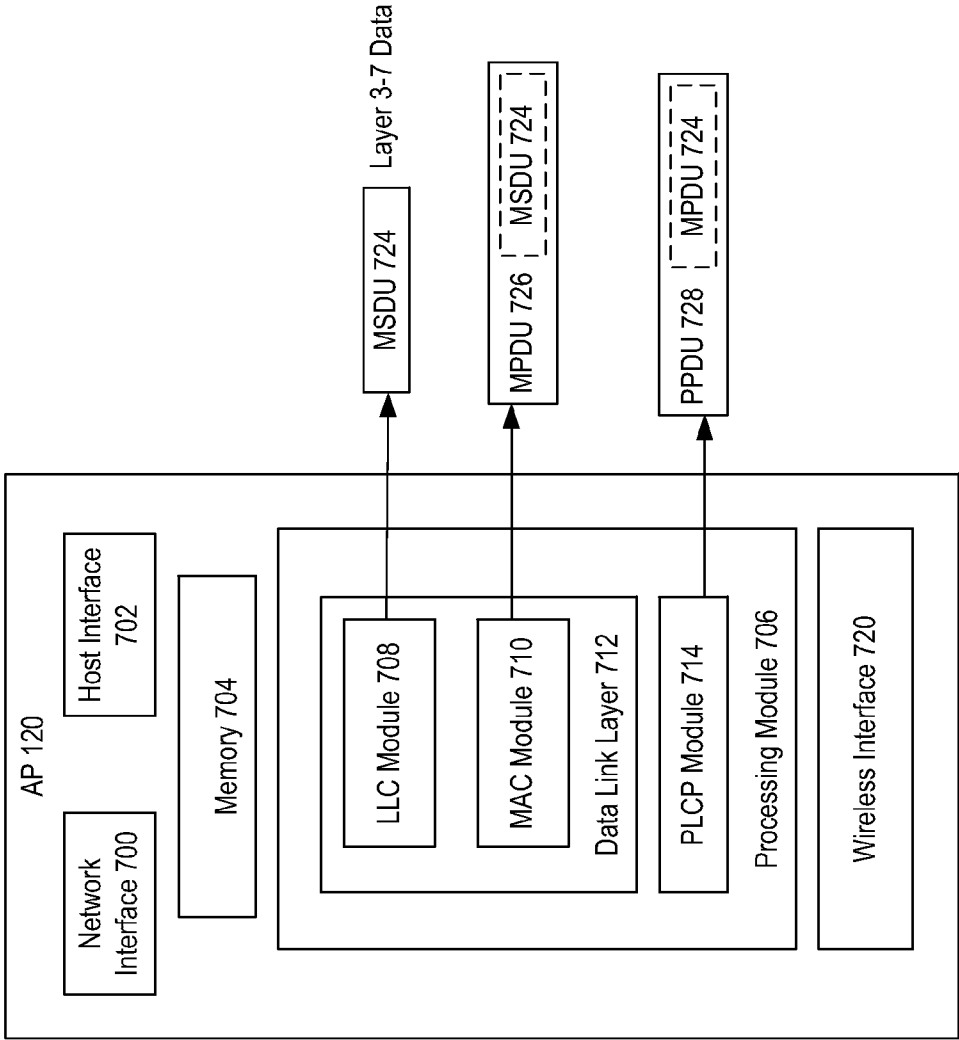
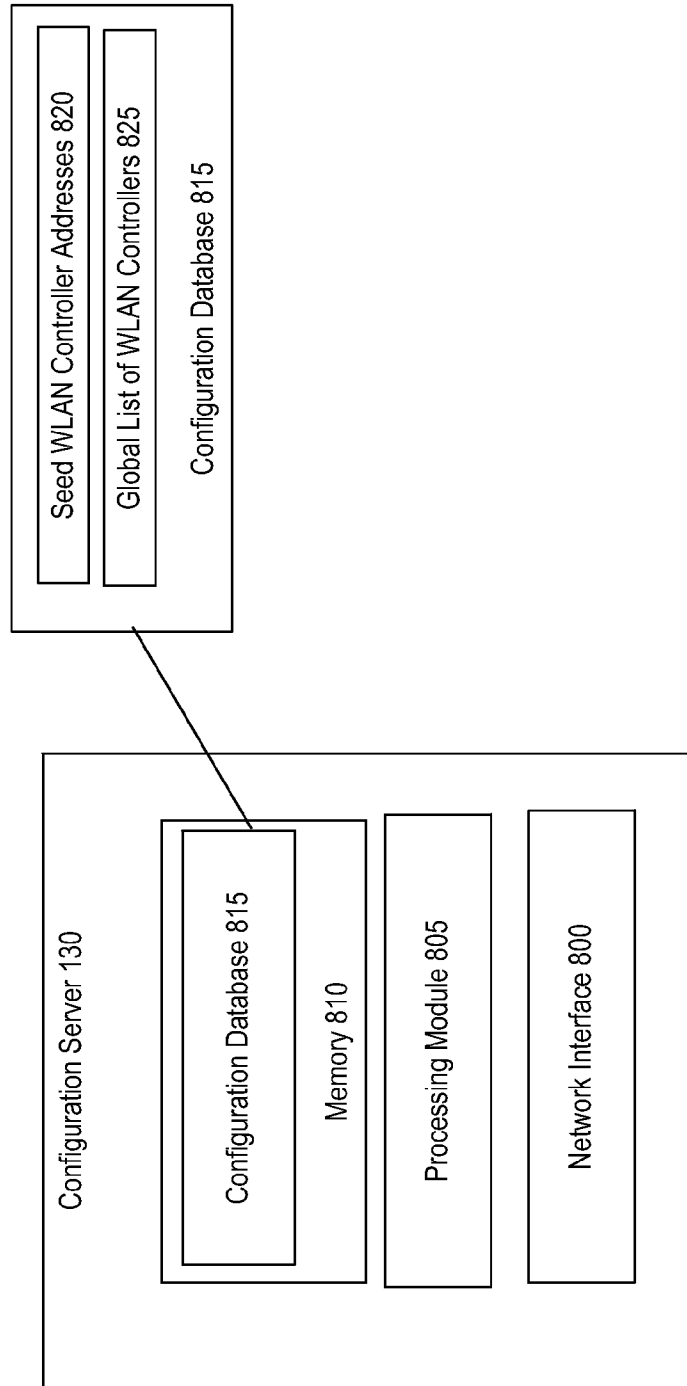


FIG. 6





**FIG. 7**



**FIG. 8**

US 9,398,629 B2

1

**SYSTEM AND METHOD FOR A  
DISTRIBUTED WIRELESS NETWORK****CROSS-REFERENCE TO RELATED PATENTS**

Not Applicable.

**STATEMENT REGARDING FEDERALLY  
SPONSORED RESEARCH OR DEVELOPMENT**

Not Applicable.

**INCORPORATION-BY-REFERENCE OF  
MATERIAL SUBMITTED ON A COMPACT DISC**

Not applicable.

**BACKGROUND****1. Technical Field**

This application relates generally to communications and in particular to systems and methods for distributed wireless networks.

**2. Description of Related Art**

This section describes related art, and accordingly, the statements in this section are not admissions of prior art.

Communication systems are known to support wireless and wire lined communications between wireless and/or wire lined devices. Such communication systems range from national and/or international cellular telephone systems to the Internet to point-to-point wireless networks. The communication systems may operate in accordance with one or more communication standards. For instance, wireless communication systems may operate in accordance with one or more standards including, but not limited to, IEEE 802.11 standards, WiMAX, Bluetooth, advanced mobile phone services (AMPS), digital AMPS, global system for mobile communications (GSM), code division multiple access (CDMA), local multi-point distribution systems (LMDS), multi-channel-multi-point distribution systems (MMDS), and/or variations thereof.

Depending on the type of wireless communication system, a wireless device, such as a wireless local area network (WLAN) telephone, personal or laptop computer, smart tablet, camera, entertainment equipment, set-top box, two-way radio, personal digital assistant (PDA), etc. communicates directly or indirectly with other wireless devices. For direct communications (also known as point-to-point communications), the participating wireless devices tune their receivers and transmitters to the same channel or channels (e.g., one of the plurality of radio frequency (RF) carriers of the wireless communication system) and communicate over that channel (s). For indirect wireless communications, a wireless device communicates directly with an associated access point (e.g., for an 802.11 type WLAN) via an assigned channel.

To complete a communication connection between wireless devices, the associated access points communicate with each other directly or through wireless local area network (WLAN) controllers. A typical wireless network architecture restricts the location of WLAN controllers in a same mobility domain to a single layer 2 network. This restriction allows WLAN controllers to discover other WLAN controllers in the same mobility domain using layer 2 broadcast protocols within the single layer 2 network. A more flexible solution is needed to provide for more distributed wireless network architectures.

2

**SUMMARY**

In an embodiment, a wireless local area network (WLAN) controller in a mobility domain comprises at least one memory and a processing module operable to determine an address of at least one seed WLAN controller in the mobility domain; register with the at least one seed WLAN controller in the mobility domain; and receive information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller.

In another embodiment, a method for discovery by a WLAN controller in a mobility domain comprises determining a layer 3 address of at least one seed WLAN controller in the mobility domain; registering with the at least one seed WLAN controller in the mobility domain; receiving information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller; and receiving synchronized wireless device information from the at least one seed WLAN controller in the mobility domain.

In still another embodiment, a WLAN controller in a mobility domain comprises at least one memory and at least one processing module operable to register with the at least one seed WLAN controller in the mobility domain; receive address information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller; receive synchronized wireless device information from the at least one seed WLAN controller in the mobility domain; intercept a control message from a configuration server to an access point, wherein the control message includes a global list of WLAN controllers in the mobility domain; alter the global list of WLAN controllers to generate an altered list of WLAN controllers; and transmit the control message to the access point with the altered list of WLAN controllers.

In still another embodiment, a WLAN controller in a mobility domain is operable to intercept a control message from a configuration server to an access point, wherein the control message includes a global list of WLAN controllers; alter the global list of WLAN controllers to generate an altered list of WLAN controllers; and transmit the control message to the access point with the altered list of WLAN controllers.

In some embodiments of any of the above apparatus/methods, the WLAN controller is operable to register with the at least one seed WLAN controller in the mobility domain by: transmitting a register request including a layer 3 address of the WLAN controller to the at least one seed WLAN controller with a mobility domain identifier of the mobility domain; and receiving a register acknowledgement from the at least one seed WLAN controller when the mobility domain identifier matches a mobility domain identifier of the at least one seed WLAN controller.

In some embodiments of any of the above apparatus/methods, the information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller includes at least an IP address for the other WLAN controllers in the mobility domain.

In some embodiments of any of the above apparatus/methods, the WLAN controller is in a first access network and wherein the at least one seed WLAN controller is in a second, different access network. In some embodiments of any of the above apparatus/methods, the first access network includes at least one of: a layer 2 network and a layer 3 network and wherein the second, different access network includes at least a different one of: a layer 2 network and a layer 3 network.

In some embodiments of any of the above apparatus/methods, the WLAN controller is further operable to receive synchronized wireless device information from the at least one

US 9,398,629 B2

3

seed WLAN controller in the mobility domain. In some embodiments of any of the above apparatus/methods, the synchronized wireless device information includes information to allow a wireless device to roam between a first AP adopted by the WLAN controller in the first access network and a second AP adopted by the seed WLAN controller in the second, different access network.

In some embodiments of any of the above apparatus/methods, the WLAN controller is operable to determine an address of at least one seed WLAN controller in the mobility domain by transmitting a discover request to a configuration server and receiving a discover response that includes the address of the at least one seed WLAN controller.

In some embodiments of any of the above apparatus/methods, the WLAN controller is operable to intercept a control message from a configuration server to an access point, wherein the control message includes a global list of WLAN controllers; alter the global list of WLAN controllers to generate an altered list of WLAN controllers; and transmit the control message to the access point with the altered list of WLAN controllers.

In some embodiments of any of the above apparatus/methods, the AP is directly connected to the WLAN controller, and the WLAN controller alters the global list of WLAN controllers to generate an altered list of WLAN controllers by inserting an address of the WLAN controller and re-prioritizing the global list of WLAN controllers such that the address of the WLAN controller has a highest priority address in the altered list of WLAN controllers.

In some embodiments of any of the above apparatus/methods, the AP is indirectly connected to the WLAN controller, and the WLAN controller is operable to alter the global list of WLAN controllers to generate an altered list of WLAN controllers by inserting an address of the WLAN controller and re-prioritizing the global list of WLAN controllers such that the address of the WLAN controller has a highest priority address in the altered list of WLAN controllers.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Some embodiments of apparatus and/or methods are now described, by way of example only, and with reference to the accompanying drawings, in which:

FIG. 1 illustrates a schematic block diagram of an embodiment of a wireless distributed network;

FIG. 2 illustrates a logical flow diagram of an embodiment of a method for discovery of a WLAN controller in a distributed wireless network;

FIG. 3 illustrates a logical flow diagram of an embodiment of a method for establishing an association between an access point and a WLAN controller;

FIG. 4 illustrates a logical flow diagram of another embodiment of a method for establishing an association between an access point and a WLAN controller;

FIG. 5 illustrates a logical flow diagram of another embodiment of a method for establishing an association between an access point and a WLAN controller;

FIG. 6 illustrates a schematic block diagram of an embodiment of a WLAN controller in a wireless distributed network;

FIG. 7 illustrates a schematic block diagram of an embodiment of an access point; and

FIG. 8 illustrates a schematic block diagram of an embodiment of a configuration server in a wireless distributed network.

#### DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

A mobility domain includes a plurality of wireless local area network (WLAN) controllers that are configured with a

4

mobility list including each other's layer 2 (such as Ethernet MAC addresses) and Layer 3 addresses (such as IP addresses), allowing wireless devices to seamlessly roam between the WLAN controllers in the mobility domain.

WLAN controllers in a mobility domain need to dynamically discover other WLAN controllers in the same mobility domain and to share information and forward data traffic, e.g. when inter-controller roaming occurs. To ensure discovery of other WLAN controllers in the same mobility domain, a typical wireless network architecture restricts the location of WLAN controllers in a same mobility domain to a single layer 2 network. This restriction allows WLAN controllers to discover other WLAN controllers in the same mobility domain using layer 2 broadcast protocols within the single layer 2 network. Unfortunately, there is no current mechanism for dynamically discovering WLAN controllers that are distributed across layer 2 (L2) and layer 3 (L3) network boundaries. Only a static configuration of WLAN controllers across L3 network boundaries currently exists. There is no scalable mechanism for discovering WLAN controllers dynamically at initial deployment into a network. As such, these known solutions do not allow for a scalable wireless distributed network with dynamic discovery of WLAN controllers spread across L2 and L3 boundaries.

In an embodiment, a wireless distributed network architecture is described that includes WLAN controllers in a same mobility domain located in a plurality of layer 2 (L2) and/or layer 3 (L3) networks. A WLAN controller discovery process is described that allows WLAN controller discovery between WLAN controllers in a mobility domain having network connectivity that are spread across one or more L2 and/or L3 network boundaries. In addition, an embodiment described herein provides for dynamic adoption of access points (APs) by WLAN controllers in a wireless distributed network.

FIG. 1 illustrates a schematic block diagram of an embodiment of a wireless distributed network 100. The wireless distributed network 100 includes a plurality of WLAN controllers 105a-d deployed across one or more L2 and L3 access networks 140, e.g. L2 and/or L3 network boundaries separate one or more of the plurality of WLAN controllers 102. The access networks 140 include layer 2 networks, such as Ethernet networks, and/or L3 networks, such as IP networks. In an embodiment access network 140a and access network 140b are separately configured networks operated by different network providers or under control of different network managers. The access networks 140a and 140b are operably connected by a core or metro wide area network (WAN) 115. WAN network 115 is preferably a layer 3 core or metro network and may include internet connectivity as well as connectivity to the access networks 140a and 140b. Though FIG. 1 illustrates only two access networks 140, additional access networks 140 may be incorporated in the distributed network operably coupled by WAN 115 or by additional WANs 115, such as the internet.

The network nodes 110a-f may be similar devices or different devices, such as switches or routers. The network nodes 110a-f may have a multi-slot chassis-based architecture with a plurality of network interface modules or have a stackable node architecture and include a plurality of network elements coupled by a backplane. In another embodiment, a network node 110 includes a single module node architecture, such as a single stackable element or alternatively, a multi-slot chassis-based architecture with a single network interface module.

The WLAN controllers 105 include stand-alone wireless controllers, such as wireless controller 105a, or are WLAN controllers 105 incorporated in a network node 110, such as

US 9,398,629 B2

5

WLAN controllers **105b**, **105c**, and **105d**. A wireless controller **105** is a device that can manage and control communications with a plurality of access points **120**.

The access points (APs) **120** are devices capable of providing wireless local area network (WLAN) services and that can communicate with a WLAN controller **105**. The access points **120** include fixed access points that are connected through a wire line connection to the WLAN controllers **105** and nodes **110** or the access points **120** may be roaming access points that are connected to the WLAN controllers **105** and network nodes through wireless connections. The access points **120** provide WLAN service to wireless devices **125**. An example of a suitable technique for providing WLAN service includes operation in accordance with a WLAN protocol such as any of the protocols defined in the IEEE 802.11 set of standards, such as IEEE 802.11a/b/g/n/ac and further iterations thereof.

In an embodiment, the distributed network **100** includes configuration server **130**, such as a dynamic host configuration protocol (DHCP) server or other type of node or device that provides configuration information to network nodes or has similar functionality as described herein with respect to configuration server **130**. Dynamic Host Configuration Protocol (DHCP) is a standardized networking protocol used on Internet Protocol (IP) networks for dynamically distributing network configuration parameters as defined, inter alia, in IETF Network Working Group RFC 2131 Dynamic Host Configuration Protocol dated March 1997. Though DHCP and messages from the DHCP are described herein, other protocols may be utilized in addition to or alternatively from DHCP to provide the network configuration functionalities described herein. Configuration server **130** is operably connected to WAN **115** in the distributed wireless network **100** though it may also be connected to one of the access networks **140a** or **140b** or otherwise located within the distributed network **100**. Configuration server **130** may be a standalone device or included within a network management system or within one or more other nodes of the distributed network **100**.

The WLAN controllers **105** in distributed network **100** are configured with a same mobility domain identifier and are thus are in a same mobility domain **135**. The WLAN controllers **105** include a mobility list including each other's layer 2 (such as Ethernet MAC addresses) and/or Layer 3 addresses (such as IP addresses) and exchange information, allowing wireless devices **125** to seamlessly roam between the WLAN controllers **105** in the mobility domain **135**. For example, a wireless device may roam between APs **120** in the same mobility domain **135** without needing to perform authentication, such as IEEE 802.1X-based authentication, at each AP. The APs **120** in the same mobility domain **135** may perform, for example, fast Basic Service Set (BSS) transition services to provide seamless roaming. Fast BSS transition services is defined, inter alia, in IEEE 802.11r-2008 Fast Basic Service Set (BSS) dated Jul. 15, 2008.

However, APs **120** adopted by WLAN controllers **105** in different mobility domains are not allowed to perform fast BSS transition services and must require re-authentication of wireless devices **125** roaming from one AP **120** in a first mobility domain to a second AP **120** in another mobility domain. Thus, expanding the mobility domain to include WLAN controllers **105** in a plurality of different networks **140** aids in roaming of wireless devices **125** in a larger geographical area, such as a college campus, office complex or amusement park.

The WLAN controllers **105** in mobility domain **135** need to dynamically discover other WLAN controllers **105** in the

6

same mobility domain across the one or more L2 and/or L3 access networks **140** in order to synchronize wireless device information, such as authentication status, QOS policies, FW policies, ACLs, etc. and to forward data traffic, e.g. when inter-controller roaming occurs. Keeping this information synchronized facilitates seamless mobility as wireless devices **125** roam from one AP **120** adopted by a WLAN controller **105** in a first access network **140a** to another AP **120** adopted by another WLAN controller **105** in a second access network **140b**, wherein both WLAN controllers **105** are configured with a same mobility domain **135**. An embodiment described herein provides for discovery of devices across one or more L2 and L3 network boundaries, and in specific provides for dynamic discovery of WLAN controllers **105** in distributed wireless network **100**.

FIG. 2 illustrates a logical flow diagram of an embodiment of a method **200** for discovery of a WLAN controller **105** in distributed wireless network **100**. In an embodiment, at least one WLAN controller **105** is configured as a seed controller though in this example, for redundancy and resiliency reasons, two or more WLAN controllers **105** are configured as seed controllers. For example, referring to FIG. 1, WLAN controllers **105a** and **105b** are statically configured as seed controllers and, e.g., are assigned static IP addresses. The seed WLAN controllers **105a** and **105b** are also configured with a same mobility domain identifier for mobility domain **135**. In addition, the seed WLAN controllers **105a** and **105b** may be configured with a controller group identifier, as described in more detail herein. The IP addresses for the one or more seed WLAN controllers is provided to the configuration server **130** with the associated mobility domain identifier for mobility domain **135**. The MAC addresses for the one or more seed WLAN controllers may also be provided. The configuration server **130** stores the addresses for the one or more seed WLAN controllers **105a** and **105b** associated with mobility domain **135**.

In this example, WLAN controller **105d** is being deployed into the distributed network **100**. WLAN controller **105d** is located within a different network **110b** than the seed WLAN controllers **105a** and **105b**. As seen in FIG. 1, seed WLAN controllers **105a** and **105b** are deployed in a first access network **140a** while WLAN controller **105d** is deployed in a second different access network **140b** in mobility domain **135**. Upon its deployment, WLAN controller **105d** is configured with at least a mobility domain identifier corresponding to mobility domain **135**. Other basic configuration parameters, such as its IP address and the controller group information, may also be configured. After configuration, WLAN controller **105d** needs to discover and synchronize wireless device information with the other WLAN controllers **105** in mobility domain **135**.

In an embodiment, WLAN controller **105d** is initially configured with the IP addresses for the one or more seed WLAN controllers **105a** and **105b** at its deployment. Thus, WLAN controller **105d** knows the IP address of the one or more seed WLAN controllers **105a** and **105b** and may begin the discovery process with step **215**. In another embodiment, WLAN controller **105d** is not initially configured with the IP address for the one or more WLAN controllers and must determine their addresses. In this embodiment, WLAN controller **105d** transmits a discover request message to configuration server **130** in step **205** in FIG. 2. The discover request message includes the IP address of the newly deployed WLAN controller **105d** and its associated mobility domain **135**. Alternatively, the IP address of the newly deployed WLAN controller **105d** and its associated mobility domain **135** may be trans-



mitted by the WLAN controller **105d** to the configuration server **130** in a separate register request message.

The configuration server **130** stores the IP address of the newly deployed WLAN controller **105d** and its associated mobility domain **135**. The configuration server **130** is configured to retrieve the addresses for the one or more seed WLAN controllers in the same mobility domain and to transmit a Discover Response Message with the addresses of the one or more seed controllers to WLAN controller **105d** in step **210**. The seed WLAN controller information includes at least the IP address for the one or more seed WLAN controllers and may also include other information, such as controller group identifier and MAC address. In this example, the IP addresses of the one or more WLAN controllers correspond to the IP addresses of WLAN controllers **105a** and **105b**.

The newly deployed WLAN controller **105d** initiates a discovery protocol with one of the seed WLAN controllers **105a** and **105b**. The discovery protocol may be a proprietary protocol or may use a User Datagram Protocol (UDP) or Transmission Control Protocol (TCP) protocol to perform the functions described herein. The newly deployed WLAN controller **105d** selects one of the seed WLAN controllers **105a** and **105b**. The selection may be based on an order or priority of the IP addresses of the seed WLAN controllers **105a** and **105b** in the Discover Response Message or based on other criteria. In this example, newly deployed WLAN controller **105d** selects seed WLAN controller **105a** though the process would be similar if seed WLAN controller **105b** is selected.

The newly deployed WLAN controller **105d** transmits a register request message to the selected seed WLAN controller **105a**, wherein the register request message includes at least its IP address and mobility domain identifier corresponding to mobility domain **135** as shown in Step **215**. The register request message may include other configuration parameters of the newly deployed WLAN controller **105d**, such as the controller group identifier and MAC address. The seed WLAN controller **105a** verifies that the mobility domain of the newly deployed WLAN controller **105d** matches its own mobility domain. When it matches, the seed WLAN controller **105a** accepts the registration of the newly deployed WLAN controller **105d** and transmits a register acknowledgment (Ack) message of success in step **220**. The register Ack message includes information for the other WLAN controllers **105** registered in the same mobility domain **135**. This WLAN controller information for the other WLAN controllers **105** includes at least the IP address of the WLAN controllers **105** and may also include other information, such as the controller group information and MAC addresses of the other WLAN controllers **105**.

Additionally, the seed WLAN controller **105a** transmits a controller update message as shown in step **225** including information of the newly registered WLAN controller **105d** to the other WLAN controllers (e.g., WLAN controllers **105b** and **105c**) in the mobility domain **135**. The information of the newly registered WLAN controller **105d** includes at least the IP address of the WLAN controller **105d** and may also include other information, such as the controller group information and MAC address of WLAN controller **105d**.

The newly registered WLAN controller **105d** transmits a client database synchronization request to seed WLAN controller **105a** in step **230**. The seed WLAN controller **105a** then transmits a client database synchronization message to the newly registered WLAN controller **105d** in step **235**. The client database synchronization message includes synchronized wireless device information, such as authentication status, quality of service (QOS) policies, forwarding (FW) policies, access control lists (ACLs), etc., for wireless devices

**125** associated with a plurality of APs **120** in the mobility domain **135**. The synchronized wireless device information allows the wireless devices **125** to roam between the APs adopted by the WLAN controllers **105** in mobility domain **135**. The newly registered WLAN controller **105d** transmits a client database synchronization complete message to the seed WLAN controller **105a** when synchronization is completed, as shown in step **240**.

Control and data path connections are then setup between the newly registered WLAN controller **105d** and the other WLAN controllers **105b**, **105c** in the mobility domain **135** including the seed WLAN controller **105a** as shown in steps **250** and **260** to form a mesh of control and data connections. This mesh of control and data connections between the WLAN controllers **105** facilitates seamless roaming of the wireless devices **125** moving across APs that are controlled by different WLAN controllers **105** in the mobility domain **135**. To track the other WLAN controllers **105** in the mobility domain **135**, the WLAN controllers **105** exchange keep alive messages or other types of tracking messages as shown in steps **265** and **270**.

The WLAN controllers **105** in mobility domain **135** are thus able to dynamically discover other WLAN controllers **105** in the same mobility domain across one or more L2 and/or L3 network boundaries in order to synchronize wireless device information for wireless devices **125** associated with a plurality of APs **120** in the mobility domain **135**, such as authentication status, QOS policies, FW policies, ACLs, etc. This process facilitates seamless mobility as wireless devices **125** roam from one AP **120** adopted by a WLAN controller **105** in a first access network to another AP **120** adopted by another WLAN controller **105** in a second different access network in mobility domain **135**.

Another problem encountered in a distributed wireless network involves adoption of APs **120** by the WLAN controllers **105**. Currently, WLAN controllers are either statically configured on the APs or the APs receive a static list of addresses of the WLAN controllers through a DHCP request or the APs receive a list of addresses of the WLAN controllers using a L2 discovery mechanism. However, the L2 discovery mechanism only allows discovery of WLAN controllers within the same L2 network as the AP. This L2 discovery mechanism does not allow discovery across L2 or L3 network boundaries. With respect to the DHCP request option, the APs use the DHCP services in their native VLAN for network addressing and to receive a list of WLAN controller IP addresses from the DHCP server. Currently though, every AP connected throughout the network receives one list of WLAN controllers from the DHCP server, e.g. a static list of WLAN controllers deployed in the network. This option fails to adapt to new WLAN controllers that are deployed in the network. And this option is not sufficient when the WLAN controllers are distributed across a plurality of L2 or L3 networks in a mobility domain. These solutions do not work well in a distributed WLAN controller deployment with hundreds of WLAN controllers across multiple networks wherein the APs may be directly connected or indirectly connected through a L2 or L3 network to a WLAN controller. As such, there is a need for dynamic adoption of APs by WLAN controllers in a wireless distributed network.

An AP **120** needs connectivity to a WLAN controller **105** to function. The WLAN controller **105** may be directly connected to the AP **120** (e.g. no intervening nodes between the WLAN controller **105** and the AP **120**) or may be indirectly connected to the AP **120** (e.g., reachable through one or more nodes or one or more L2 or L3 networks **110**, **115**). The process of an AP **120** discovering a WLAN controller **105** and

US 9,398,629 B2

9

requesting association with the WLAN controller **105** is referred to herein as the “adoption” process. An embodiment described herein enhances DHCP services when configuration server **130** provides a WLAN controller list to an AP **120** during the adoption process. In this embodiment, WLAN controllers **105** in mobility domain **135** intelligently influence the WLAN controller list transmitted to the AP **120** from the configuration server **130** using a feature called snooping. Though DHCP and messages from the DHCP are described herein, other protocols may be utilized in addition to or alternatively from DHCP to provide the network configuration functionalities described herein.

In an embodiment, configuration server **130** includes a global list of WLAN controllers in mobility domain **135**. Using snooping, a WLAN controller **105** intercepts a message from the configuration server **130** to an AP that includes the global list of WLAN controllers during the adoption process. In general, an AP selects the WLAN controller listed first or given highest priority in the global list from the configuration server **130**. The WLAN controller snoops the message from the configuration server **130** and alters the global list of WLAN controllers to generate an altered list of WLAN controllers to affect the selection decision of the AP. The altered list re-orders or re-prioritizes the WLAN controllers as following with respect to the AP: directly connected WLAN controller, WLAN controllers from a same controller group, and then any remaining WLAN controllers in the global controller list provided by the configuration server **130**. The WLAN controller then transmits the altered list of WLAN controllers to the AP.

FIG. 3 illustrates a logical flow diagram of an embodiment of a method **300** for establishing an association between an AP **120** and a WLAN controller **105** in mobility domain **135** when the AP **120** and WLAN controller **105** are directly connected. Referring to the distributed network **100** shown in FIG. 1, in this embodiment, AP **105a** is newly deployed. AP **105a** is directly connected to WLAN controller **105a**, e.g. no intervening nodes are between WLAN controller **105a** and AP **105a**. For example, AP **105a** is directly connected to a port of WLAN controller **105a** either through a wireline or wireless connection.

When AP **120a** is newly deployed in step **305**, it begins initiation in the distributed wireless network **100**. In this embodiment as part of the initiation, AP **120a** employs a connectivity discovery protocol to transmit messages that advertise its identity to other nodes in the network in step **310**. For example, AP **120a** may use the Link Layer Discovery Protocol (LLDP) defined in IEEE 802.1AB-REV Station and Media Access Control Connectivity Discovery dated Sep. 11, 2009 to advertise its IP address, identity, capabilities, and neighbors. Other connectivity discovery protocols may be implemented by AP **120a**, such as the Cisco Discovery Protocol (CDP), Extreme Discovery Protocol, Nortel Discovery Protocol (also known as SONMP), and Microsoft’s Link Layer Topology Discovery (LLTD). Through the connectivity discovery protocol message from AP **120a**, WLAN controller **105a** determines that it is directly connected to AP **120a** in step **315**.

AP **120a** transmits a discover request message to determine its IP address from configuration server **130** in step **320**. The discover request message may include for example a DHCP discover message with a DHCP option **60** with VCI=“VendorDeviceClassDescription”. Upon receiving the discover request message, configuration server **130** is configured to return an offer message with a global list of WLAN controllers in step **325**. The offer message may include for example a DHCP offer with DHCP option **40** with

10

VSI=global list of WLAN controllers=IP address of one or more WLAN controllers. The global list of WLAN controllers from the configuration server **130** includes the IP addresses of one or more WLAN controllers **105** in mobility domain **135**. The global list of WLAN controllers from the configuration server **130** is in an embodiment a static list.

WLAN controller **105a** intercepts or “snoops” the offer message from configuration server **130** to AP **120a** in step **330**. For example, when WLAN controller **105a** determines that it is directly connected to newly initiated AP **120a**, it begins to monitor or snoop the control virtual local area network (VLAN) of AP **120a**. For example, the WLAN controller **105a** may execute a snoop command on the control VLAN of AP **120a**. WLAN controller **105a** is then able to read the various messages transmitted having this control VLAN id. When WLAN controller **105a** receives the offer message from configuration server **130** to AP **120a**, it intercepts the offer message. WLAN controller **105a** alters the global list of WLAN controllers in the offer message to create an altered list of WLAN controllers. The altered list of WLAN controllers includes the IP address of WLAN controller **105a** as the first IP address or highest priority address in the list. In step **335**, WLAN controller **105a** transmits the offer message with the altered list of WLAN controllers.

AP **105a** receives the offer message and selects the IP address listed first or given highest priority in the altered list of WLAN controllers, e.g. WLAN controller **105a**. AP **105a** in step **340** then requests association with (or adoption by) WLAN controller **105a** to establish a control and data path connection in step **340**. When AP is associated with or adopted by the WLAN controller **105a**, WLAN controller **105a** receives and manages AP wireless device connections, authentications, and other wireless services.

Using this interception process, AP **105a** is thus influenced to select the directly connected WLAN controller **105a** for association even when the directly connected WLAN controller **105a** is not initially on the global list of WLAN controllers or is not prioritized in the global list of WLAN controllers from the configuration server **130**.

FIG. 4 illustrates a logical flow diagram of another embodiment of a method **400** for establishing an association between an access point and a WLAN controller when the WLAN controller is indirectly connected to the AP. In this embodiment, WLAN controller is connected to a same layer 2 network as the AP but is not directly connected, e.g. one or more nodes are connected between the WLAN controller and the AP. For example, in FIG. 1, AP **120b** is indirectly connected to WLAN controller **105b** through access network **140a** and node **110a**. AP **120b** is directly connected to node **110a** but is indirectly connected to WLAN controller **105b** via node **110a** and any other nodes in access network **140a**.

When AP **120b** is newly deployed in step **405**, it begins initiation in the distributed wireless network **100**. In this embodiment as part of the initiation, AP **120b** employs a connectivity discovery protocol to transmit messages that advertise its identity to other nodes in the network **110a** in step **410**. Through the connectivity discovery protocol message from AP **120b**, WLAN controller **105b** determines that it is indirectly connected to AP **120b** in step through access network **110a** in step **415**.

AP **120b** transmits a discover request message to determine its IP address from configuration server **130** in step **420**. The discover request message may include for example a DHCP discover message with a DHCP option **60** with VCI=“VendorDeviceClassDescription”. Upon receiving the discover request message, configuration server **130** is configured to return an offer message with a global list of WLAN

US 9,398,629 B2

11

controllers in step 425. The offer message may include for example a DHCP offer with DHCP option 40 with VSI=global list of WLAN controllers=IP address of one or more WLAN controllers. The global list of WLAN controllers from the configuration server 130 includes the IP addresses of one or more WLAN controllers 105 in mobility domain 135. The global list of WLAN controllers from the configuration server 130 is in an embodiment a static list.

WLAN controller 105b intercepts or “snoops” the offer message from configuration server 130 to AP 120b in step 430. For example, when WLAN controller 105b determines that it is indirectly connected to newly initiated AP 120a through access network 110a, it begins to snoop or monitor the control virtual local area network (VLAN) of AP 120b. When WLAN controller 105b receives the offer message from configuration server 130 to AP 120b, it intercepts the offer message. WLAN controller 105b alters the global list of WLAN controllers in the offer message to create an altered list of WLAN controllers. The altered list of WLAN controllers includes the IP address of WLAN controller 105b as the first IP address or highest priority address in the list. In step 435, WLAN controller 105b transmits the offer message with the altered list of WLAN controllers.

AP 105a receives the offer message and selects the IP address listed first or given highest priority in the altered list of WLAN controllers, e.g. WLAN controller 105b. AP 105b in step 440 then requests association with (or adoption by) WLAN controller 105a to establish a control and data path connection. When AP 120b is associated with or adopted by the WLAN controller 105b, WLAN controller 105b receives and manages AP wireless device connections, authentications, and other wireless services.

Using this interception process, AP 105b is thus influenced to select the indirectly connected WLAN controller 105b for association even when the indirectly connected WLAN controller 105b is not initially on the global list of WLAN controllers or is not prioritized in the global list of WLAN controllers from the configuration server 130.

FIG. 5 illustrates a logical flow diagram of another embodiment of a method 500 for establishing an association between an AP 120 and a WLAN controller 105 in mobility domain 135 when the AP 120 and WLAN controller 105 are indirectly connected via a layer 3 network. For example, FIG. 1 illustrates that AP 120c, 120d, 120e and 120f are indirectly connected to WLAN controllers 105c and 105d through access network 140b. In this example, access network 140b is a layer 3 network, such as a network including one or more routers using layer 3 IP addressing and messaging. In this example, WLAN controller 105c or WLAN controller 105d may not have a way to intercept the offer message with the global list of WLAN controllers from the configuration server 130. The offer message may already be routed by routers in access network 140b. For example, even when control frames from all VLANs are snooped, there is a chance the discover request frame from the AP is transmitted from one WLAN controller 105c or 105d while the offer message from the configuration server 130 is transmitted through a different WLAN controller 105c or 105d.

In an embodiment, Node 110c (including WLAN controller 105c) and Node 110d (including WLAN controller 105d) are associated with a controller group. When a WLAN controller in a same controller group intercepts a control frame in a snooped control VLAN (e.g., a DHCP message), the WLAN controller inserts its address and the address for other WLAN controllers in their same controller group into the control frame response from the configuration server 130. Hence, the WLAN controllers 105c and 105d each receive the offer

12

message response from the configuration server destined to one of the APs 120c, 120d, 120e and 120f and may update the global list of WLAN controllers.

An example of the method 500 for establishing an association between an AP 120 and a WLAN controller 105 in mobility domain 135 when the AP 120 and WLAN controller 105 are indirectly connected by a layer 3 network is shown in FIG. 5. In this example, AP 120c initiates in step 505. In this embodiment as part of the initiation, AP 120c employs a connectivity discovery protocol to transmit messages that advertise its identity to other nodes in the network 110b in step 510. Through the connectivity discovery protocol message from AP 120c, network node 110e detects AP 120c and determines that it is directly connected to AP 120c in step 515. Network node 110e checks that AP 120c is included in a control VLAN for DHCP services.

AP 120c then transmits a discover request message to determine its IP address from configuration server 130 in step 520. The discover request message may include for example a DHCP discover message with a DHCP option 60 with VCI=“VendorDeviceClassDescription”. In this embodiment, both WLAN controllers 105c and 105d in the same controller group, snoop the control VLAN for the newly added AP 120c. When either WLAN controller 105c or WLAN controller 105d snoops or receives the discover request message, it inserts its address and the address for other WLAN controllers in their same controller group into the control frame response from the configuration server 130.

Upon receiving the discover request message, configuration server 130 is configured to return an offer message with a global list of WLAN controllers in step 525. The offer message may include for example a DHCP offer with DHCP option 40 with VSI=global list of WLAN controllers=IP address of one or more WLAN controllers. The global list of WLAN controllers from the configuration server 130 includes the IP addresses of one or more WLAN controllers 105 in mobility domain 135. The global list of WLAN controllers from the configuration server 130 is in an embodiment a static list.

In this embodiment, WLAN controller 105c and 105d are configured in a same controller group. When either WLAN controller 105c or 105d intercepts or “snoops” the offer message from configuration server 130 to AP 120c in step 530, the WLAN controller 105c or 105d that intercepts such message checks that the offer message is also transmitted to the other WLAN controller 105c or 105d in the controller group. WLAN controller 105c or 105d alters the global list of WLAN controllers in the offer message to create an altered list of WLAN controllers. The altered list of WLAN controllers includes the IP address of WLAN controllers 105c or 105d and other WLAN controllers in the controller group as the first IP addresses or highest priority addresses in the list. In step 535, WLAN controller 105b transmits the offer message with the altered list of WLAN controllers.

AP 120c receives the offer message and selects one of the IP addresses of a WLAN controller 105c or 105d or other controller in the same controller group listed first or given highest priority in the altered list of WLAN controllers, e.g. WLAN controller 105c or 105d. AP 120c in step 540 then requests association with (or adoption by) WLAN controller 105c or 105d to establish a control and data path connection. When AP 120c is associated with or adopted by the WLAN controller 105c or 105d, the associated WLAN controller 105 receives and manages AP wireless device connections, authentications, and other wireless services.

Using this interception process, AP 120c is thus influenced to select one of the indirectly connected WLAN controllers in



US 9,398,629 B2

13

a same controller group, such as WLAN controller **105c** or **105d**, for association even when the indirectly connected WLAN controllers are not initially on the global list of WLAN controllers or are not prioritized in the global list of WLAN controllers from the configuration server **130**.

FIG. 6 illustrates a schematic block diagram of an embodiment of a WLAN controller **105** in a distributed wireless network **100**. In an embodiment, WLAN controller **105** includes a network interface module **600** having at least one MAC port interface, such as an IEEE 802.1Q compliant network interface, operable to connect to a node **110**. The AP interface module **605** is operable to connect to an AP **120** through a wired or wireless connection. In another embodiment, the WLAN controller **105** is incorporated into a node **110**. The network interface module **600** may then be incorporated into the node **110**. In addition, the AP interface may be incorporated into the node **110** as well, and the WLAN controller **105** is operable to connect to an AP **120** through the AP interface module **605** incorporated into the node **110**.

WLAN controller **105** includes one or more processing modules **645** operable to perform the functions described herein with respect to the WLAN controllers **105**. One or more processing modules **645** may also implement a logical link control (LLC) module **620**, media access control (MAC) module **625**. The LLC module **620** and MAC module **625** are part of a logical data link layer **630**. The data link layer **630** is operable to encapsulate a layer 3 frame, such as IP frame, into a MAC Service Data Unit (MSDU) **650** and then encapsulate the MSDU into a MAC Protocol Data Unit (MPDU) **655** in accordance with a WLAN protocol.

The WLAN Controller **105** also includes one or more memories **610** that store one or more controller databases **650**. The controller database **650** stores seed WLAN controller information **655** that includes IP addresses for the one or more seed WLAN controllers in mobility domain **135**. Controller database **650** also stores WLAN controller information **670** that includes information for the other WLAN controllers **105** in mobility domain **135**, such as IP addresses, MAC addresses and controller group identifiers for the other WLAN controllers. Controller database **650** also stores AP list and Corresponding Wireless devices **675** including information on associated APs **120** to the WLAN controller **105** and the mobile devices **125** associated and/or authenticated to those associated APs **120**. The controller database **650** also includes synchronized wireless device information **680**, such as authentication status, QOS policies, FW policies, ACLs, etc., of the wireless devices **125** that allows the wireless devices **125** to roam between the APs **120** adopted by the WLAN controllers **105** in mobility domain **135**.

FIG. 7 illustrates a schematic block diagram of an embodiment of an access point (AP) **120**. In an embodiment, AP **120** includes a network interface module **700** having at least one MAC port interface, such as an IEEE 802.1Q compliant network interface, operable to connect to a node **110** or WLAN controller **105** in distributed wireless network **100**. The host interface module **702** is operable to connect to a host device, if present. A peripheral interface module may also be included. In another embodiment, the network interface module **600** is incorporated into the host device and the AP **120** is operable to connect to the node **110** through a network interface module **600** in the host device. AP **120** includes a memory **704** and one or more processing modules **706** operable to perform the functions described herein with respect to the APs **120**. The one or more processing modules **706** may also implement a logical link control (LLC) module **708**, media access control (MAC) module **710** and a Physical Layer Convergence Procedure (PLCP) module **714**. The LLC

14

module **708** and MAC module **710** are part of a logical data link layer **712**. The MAC module **710** is operable to encapsulate a MAC Service Data Unit (MSDU) **724** into a MAC Protocol Data Unit (MPDU) **726** in accordance with a WLAN protocol. The Physical Layer Convergence Procedure (PLCP) Module **714** is operable to convert the MPDU **726** (also known as a PSDU at layer 1) into a PLCP Protocol Data Unit (PPDU) **728** in accordance with a WLAN protocol. The wireless interface **720** is operable to convert the PPDU **728** into a plurality of radio frequency (RF) signals in accordance with one of a plurality of operating modes of the WLAN protocol.

FIG. 8 illustrates a schematic block diagram of an embodiment of configuration server **130** in distributed network **100**. Configuration server **130** may be a standalone device or may be incorporated into or include another device. Configuration server **130** includes a network interface module **800** having at least one network interface, such as a layer 3 or layer 2 MAC compliant network interface, operable to connect to a node **110** in distributed wireless network **100**. Configuration server **130** includes one or more processing modules **805** operable to perform the functions described herein with respect to the configuration server **130**. Configuration server **130** also includes one or more memories **810** that store one or more configuration databases **815**. Configuration database **815** includes seed WLAN controller addresses **820** and global list of WLAN controllers **825**. The seed WLAN controller addresses **820** includes IP addresses for the one or more seed WLAN controllers and associated mobility domain identifiers for the one or more seed WLAN controllers. The global list of WLAN controllers **825** includes a global list of WLAN controllers in mobility domain **135**. Configuration server **130** may include seed WLAN controller addresses and a global list of WLAN controllers associated with a single mobility domain or include similar lists associated for each of a plurality of mobility domains. Configuration server **130** is operable to perform DHCP services or other type of service or protocol that provides configuration information to network nodes or has similar functionality as described herein with respect to configuration server **130**.

The WLAN controllers **105** in mobility domain **135** are thus able to dynamically discover other WLAN controllers **105** in the same mobility domain across one or more L2 and/or L3 networks in order to synchronize wireless device information for a plurality of wireless devices associated with different APs **120** that are adopted by WLAN controllers across the distributed network. The synchronized wireless device information includes, e.g., authentication status, QOS policies, FW policies, ACLs, etc. and allows the APs **120** to forward data traffic, e.g. when inter-controller roaming occurs. This process facilitates seamless mobility as wireless devices **125** roam from one AP **120** adopted by a WLAN controller **105** in a first access network to another AP **120** adopted by another WLAN controller **105** in a second different access network in mobility domain **135**. In addition, an embodiment described herein enhances the AP adoption process. When configuration server **130** provides a global list of WLAN controllers to an AP **120** during the adoption process, WLAN controllers **105** intercept or snoop the message from the configuration server **130** and alter the list to generate an altered list of WLAN controllers to affect the selection decision of the AP. The altered list re-orders or re-prioritizes the WLAN controllers as following with respect to the AP: directly connected WLAN controller, WLAN controllers from a same controller group, and then any remaining WLAN controllers in the global controller list provided by the configuration server **130**. The WLAN controller **105** then trans-

US 9,398,629 B2

15

mits the altered list of WLAN controllers to the AP **120**. This interception of the global list allows for dynamically updating the global list with newly deployed WLAN controllers **105** and for affecting the WLAN controller **105** selected for adoption by the AP **120**.

The term “module” is used in the description of one or more of the embodiments of elements herein. A module includes hardware, such as one or more processing devices and/or one or more non-transitory memory devices operable to perform one or more functions as may be described herein. A module may operate independently and/or in conjunction with other modules and may utilize the processing device and/or memory of other modules and/or operational instructions of other modules. As also used herein, a module may contain one or more sub-modules, each of which may be one or more modules. A processing device includes a microprocessor, micro-controller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on hard coding of the circuitry and/or operational instructions. The non-transitory memory device may be an internal memory or an external memory, and the memory may be a single memory device or a plurality of memory devices. The non-transitory memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, cache memory, and/or any non-transitory memory device that stores digital information. The various modules may implement one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry. The non-transitory memory device may be embedded within, or external to, the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry. A module may also include hard-coded instructions and/or software and/or operational instructions stored by an internal or external non-transitory memory device needed for execution by the module to perform the steps and/or functions described herein.

As may be used herein, the term “operable to” or “configurable to” indicates that an element includes one or more of modules, data, input(s), output(s), etc., to perform one or more of the described or necessary corresponding functions and may further include inferred coupling to one or more other items to perform the described or necessary corresponding functions. As may also be used herein, the term(s) “coupled”, “coupled to”, “connected to” and/or “connecting” or “interconnecting” includes direct connection or link between nodes/devices and/or indirect connection between nodes/devices via an intervening item (e.g., an item includes, but is not limited to, a component, an element, a circuit, a link, a module, a node, a switch, a router, other network element, etc.). As may further be used herein, inferred connections (i.e., where one element is connected to another element by inference) includes direct and indirect connection between two items in the same manner as “connected to”.

Embodiments have also been described above with the aid of logical flow diagrams illustrating the performance of specified functions and method steps and relationships thereof. The boundaries and sequence of these functional building blocks and method steps have been arbitrarily defined herein for convenience of description. Alternate boundaries and sequences may be implemented and/or defined with similar functions and relationships. Any such alternate boundaries or sequences are thus within the scope and spirit of the claims. Similarly, flow diagram steps may also have been arbitrarily defined herein to illustrate certain significant functionality. To

16

the extent used, the flow diagram steps and sequence can be defined otherwise and still perform similar functionality. Such alternate definitions of both functional building blocks and flow diagram steps and sequences are thus within the scope of the claims. One of average skill in the art will also recognize that the functional building blocks, and other illustrative blocks, modules and components herein, can be implemented as illustrated or by one or multiple discrete components, networks, systems, databases or processing modules executing appropriate software and the like or any combination thereof.

What is claimed is:

**1.** A wireless local area network (WLAN) controller in a mobility domain, comprising:

at least one memory; and

a processing module operable to:

determine an address of at least one seed WLAN controller in the mobility domain;

register with the at least one seed WLAN controller in the mobility domain by:

transmitting a register request including a layer 3 address of the WLAN controller to the at least one seed WLAN controller with a mobility domain identifier of the mobility domain; and

receiving a register acknowledgement from the at least one seed WLAN controller when the mobility domain identifier matches a mobility domain identifier of the at least one seed WLAN controller; and receive information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller.

**2.** The WLAN controller of claim **1**, wherein the information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller includes at least an IP address for the other WLAN controllers in the mobility domain.

**3.** The WLAN controller of claim **1**, wherein the WLAN controller is in a first access network and wherein the at least one seed WLAN controller is in a second, different access network.

**4.** The WLAN controller of claim **3**, wherein the first access network includes at least one of: a layer 2 network and a layer 3 network and wherein the second, different access network includes at least a different one of: a layer 2 network and a layer 3 network.

**5.** The WLAN controller of claim **4**, wherein the processing module is further operable to:

receive synchronized wireless device information from the at least one seed WLAN controller in the mobility domain.

**6.** The WLAN controller of claim **5**, wherein the synchronized wireless device information includes information to allow a wireless device to roam between a first AP adopted by the WLAN controller in the first access network and a second AP adopted by the seed WLAN controller in the second, different access network.

**7.** The WLAN controller of claim **1**, wherein the processing module is operable to determine an address of at least one seed WLAN controller in the mobility domain by:

transmitting a discover request to a configuration server; and

receiving a discover response that includes the address of the at least one seed WLAN controller.

**8.** A method for discovery by a WLAN controller in a mobility domain, comprising:

determining a layer 3 address of at least one seed WLAN controller in the mobility domain;

US 9,398,629 B2

17

registering with the at least one seed WLAN controller in the mobility domain;

receiving information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller;

receiving synchronized wireless device information from the at least one seed WLAN controller in the mobility domain;

transmitting a register request including a layer 3 address of the WLAN controller to the at least one seed WLAN controller with a mobility domain identifier of the mobility domain; and

receiving a register acknowledgement from the at least one seed WLAN controller when the mobility domain identifier matches a mobility domain identifier of the at least one seed WLAN controller.

9. The method of claim 8, wherein the information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller includes at least an IP address for the other WLAN controllers in the mobility domain.

10. The method of claim 8, wherein the WLAN controller is in a first access network and wherein the at least one seed WLAN controller is in a second, different access network.

11. The method of claim 10, wherein the first access network includes at least one of: a layer 2 network and a layer 3 network and wherein the second, different access network includes at least a different one of: a layer 2 network and a layer 3 network.

12. A method for discovery by a WLAN controller in a mobility domain, comprising:

determining a layer 3 address of at least one seed WLAN controller in the mobility domain;

registering with the at least one seed WLAN controller in the mobility domain;

receiving information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller;

receiving synchronized wireless device information from the at least one seed WLAN controller in the mobility domain;

intercepting a control message from a configuration server to an access point by the WLAN controller, wherein the control message includes a global list of WLAN controllers;

altering the global list of WLAN controllers to generate an altered list of WLAN controllers; and

transmitting the control message to the access point with the altered list of WLAN controllers.

13. The method of claim 12, wherein the AP is directly connected to the WLAN controller; and

wherein altering the global list of WLAN controllers to generate an altered list of WLAN controllers includes: inserting an address of the WLAN controller; and

18

re-prioritizing the global list of WLAN controllers such that the address of the WLAN controller has a highest priority address in the altered list of WLAN controllers.

14. The method of claim 12, wherein the AP is indirectly connected to the WLAN controller; and

wherein altering the global list of WLAN controllers to generate an altered list of WLAN controllers includes: inserting an address of the WLAN controller; and re-prioritizing the global list of WLAN controllers such that the address of the WLAN controller has a highest priority address in the altered list of WLAN controllers.

15. A WLAN controller in a mobility domain, comprising: at least one memory; and

at least one processing module operable to:

register with the at least one seed WLAN controller in the mobility domain;

receive address information for other WLAN controllers in the mobility domain from the at least one seed WLAN controller;

receive synchronized wireless device information from the at least one seed WLAN controller in the mobility domain;

intercept a control message from a configuration server to an access point, wherein the control message includes a global list of WLAN controllers in the mobility domain;

alter the global list of WLAN controllers to generate an altered list of WLAN controllers; and

transmit the control message to the access point with the altered list of WLAN controllers.

16. The WLAN controller of claim 15, wherein the processing module is further operable to determine an address of at least one seed WLAN controller in the mobility domain by:

transmitting a register request including a layer 3 address of the WLAN controller to the at least one seed WLAN controller with a mobility domain identifier of the mobility domain; and

receiving a register acknowledgement from the at least one seed WLAN controller when the mobility domain identifier matches a mobility domain identifier of the at least one seed WLAN controller.

17. The WLAN controller of claim 15, wherein the WLAN controller is in a first access network that includes at least one of: a layer 2 network and a layer 3 network and wherein the at least one seed WLAN controller is in a second, different access network that includes at least a different one of: a layer 2 network and a layer 3 network.

18. The WLAN controller of claim 17, wherein the synchronized wireless device information includes information to allow a wireless devices to roam between a first AP adopted by the WLAN controller in the first access network and a second AP adopted by the seed WLAN controller in the second, different access network.

\* \* \* \* \*